





真空泵 / Vacuum Pump



型号 VP0940T

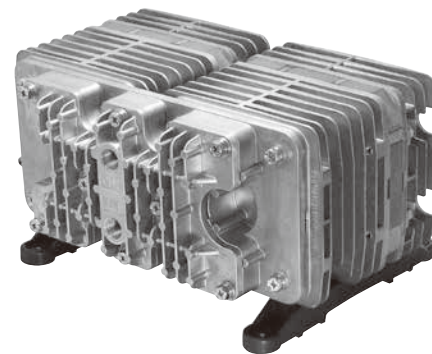



空气量和消耗功率 / Airflow & Power Consumption

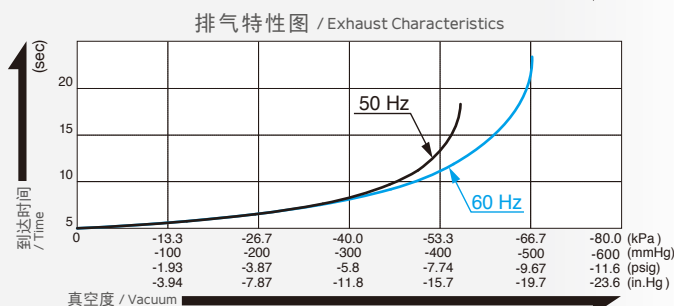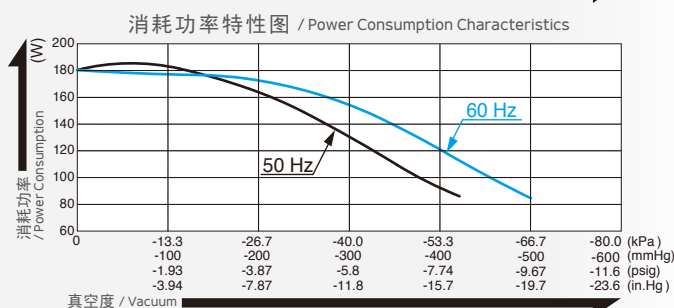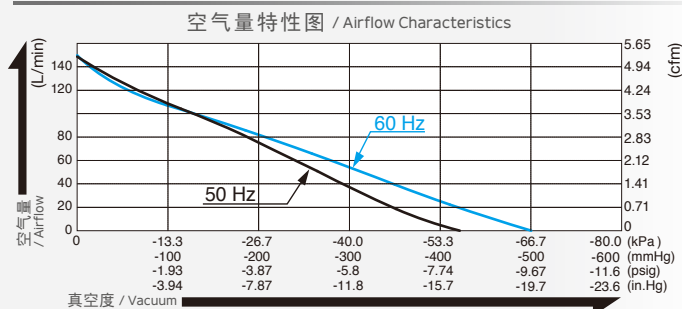

* 特性图只是参考值，并不是保证值。

/The characteristic charts are for reference only and are not guaranteed.

外形尺寸图 / External Dimensions (单位 / Unit : mm)

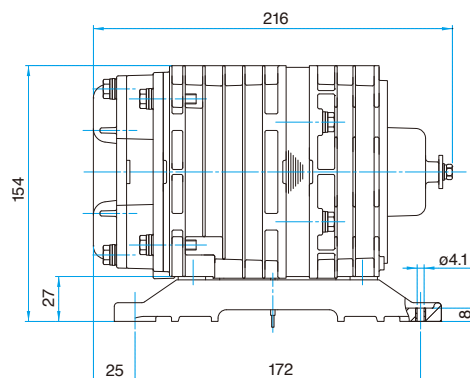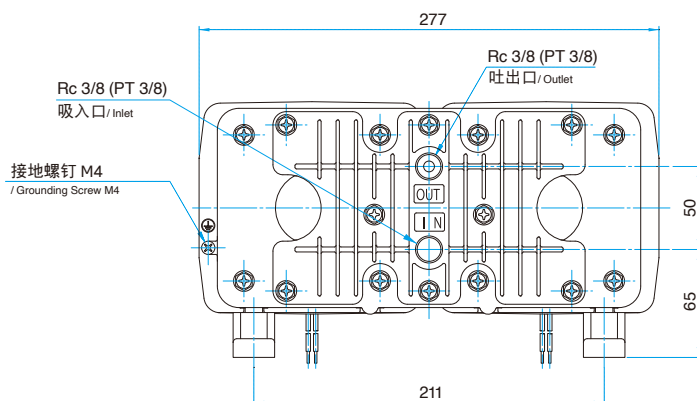


规格 / Specifications

达到真空度 *1 / Attainable Vacuum	-53.3 kPa (-400 mmHg) -533 mbar -15.7 in. Hg
吐出空气量 / Free Air Displacement	120 L/min 4.24 cfm
额定电压 / Rated Voltage	230 V AC*2
额定频率 / Rated Frequency	50 Hz / 60 Hz
消耗功率 / Power Consumption	185 W
耐用时间 / Rated Performance	10,000 小时 / hours
吸入口尺寸 / Inlet	ISO Rc 3/8 (内螺纹 / internal thread)
吐出口尺寸 / Outlet	ISO Rc 3/8 (内螺纹 / internal thread)
额定时间 / Duty Cycle	连续 / Continuous
线圈绝缘等级 / Coil Insulation Class	相当于 B 类 / Class B equivalent
安装尺寸 / Mounting Dimensions	172 (L) x 211 (W) mm 6 - 49/64" (L) x 8 - 5/16" (W)
本体重量 / Weight	10 kg 22 Lbs
导线长度 / Leadwire Length	320 mm 12 - 19/32"

*1: 高于 -53.5 kPa 运转时需要在进气管路上加装一个放气阀或泄压阀。/ Operations at higher than -53.5 kPa need an additional leak valve or relief valve on the inlet piping.

*2: 有关 115 V 规格的产品，请与我们联系。/ Please contact us for 115 V AC model.

接线图 / Wiring diagram

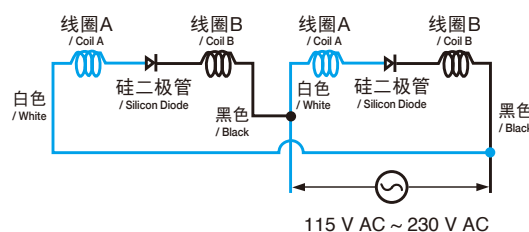

* 消音器，空气过滤器和管道不包含在产品中。

* 管道和接线需要由用户完成。

*The silencer, air filter, and pipe are not included with the product.

*Piping and wiring need to be done by the user.